
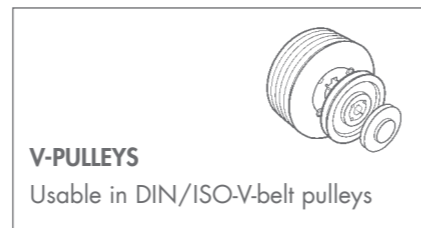


optibelt OPTIMAT OE / DK / FK / PKR

OPEN-ENDED V-BELTS – PUNCHED

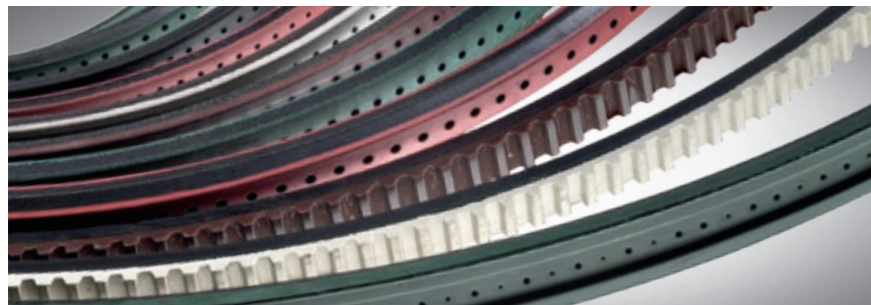


optibelt OPTIMAT OE / DK / FK

OPEN-ENDED V-BELTS
perforated, DIN 2216

SPECIAL VERSION

- available with black chloroprene cover belts
- electrically conductive (on request)


-  **OPTIMAT OE**
V-belts,
DIN 2216,
perforated
-  **OPTIMAT DK**
Double V-belts,
perforated
-  **OPTIMAT FK**
Conveyor belts,
perforated



PKR 0



PKR 1



PKR 2


HEIGHT OF TOP SURFACE			
TYPE OF TOP SURFACE	STANDARD (mm)	MAX. (mm)	CLASSIFICATION (mm)
PKR 0	2	3	–
PKR 1*	3	3	10
PKR 2	3	–	–

optibelt OPTIMAT PKR

OPEN-ENDED V-BELTS

DIN 2216 with top surface

Profiles: Z/10, A/13, B/17, C/22, 25**, D/32**

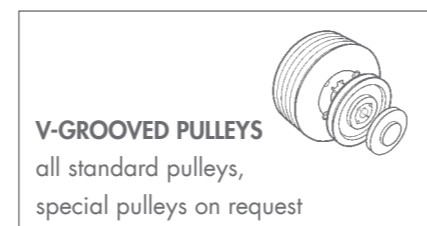

*Special versions are only available in fabrication lengths of 50 m +/- 10 %.

**The profile 25 and D/32 height of top surface is only available with 5 mm.



BELTS MADE TO MEASURE

Where performance is required in combination with customer-specific drive solutions, Optibelt delivers masterly solutions.



"For optimum performance."

Norbert, 42, foreman