optibelt KS
V-GROOVED PULLEYS

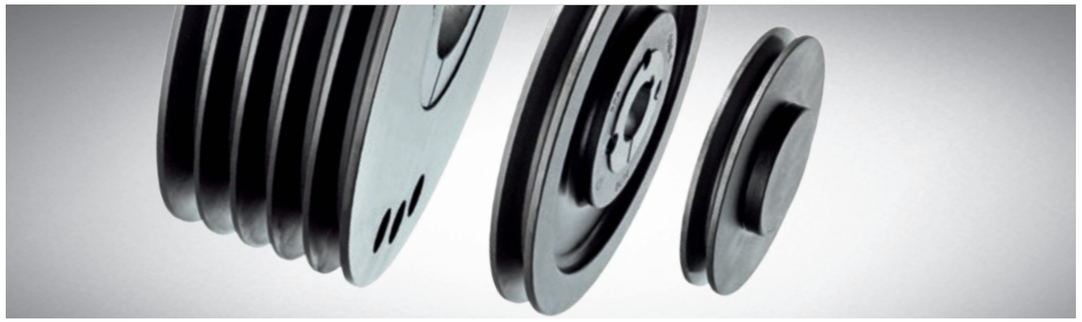

FOR CYLINDRICAL BORES*		
PROFILE	ORIENTATION CROSS SECTION	GROOVES
SPZ / 10	45 – 355 mm	1 – 3
SPA / 13	50 – 560 mm	1 – 5
SPB / 17	56 – 630 mm	1 – 6
SPC / 22	180 – 630 mm	1 – 6

FOR TAPER BUSHES*		
PROFILE	ORIENTATION CROSS SECTION	GROOVES
SPZ / 10	50 – 630 mm	1 – 8
SPA / 13	63 – 630 mm	1 – 5
SPB / 17	100 – 1000 mm	1 – 10
SPC / 22	200 – 1250 mm	2 – 10

* in accordance with DIN 2211

optibelt RBS
RIBBED BELT PULLEYS

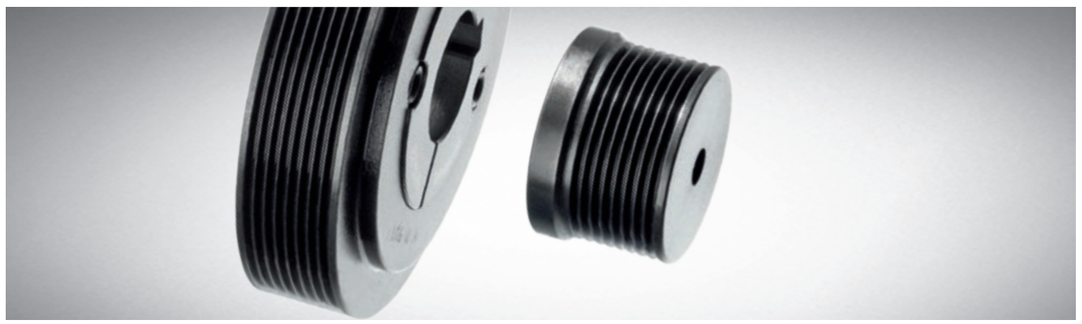

FOR CYLINDRICAL BORES		
DESIGNATION	DIMENSIONS	GROOVES
4 PJ	22.5 – 42.5 mm	4
8 PJ	22.5 – 42.5 mm	8
12 PJ	22.5 – 42.5 mm	12

FOR TAPER BUSHES		
DESIGNATION	DIMENSIONS	GROOVES
TB 4 PJ	47.5 – 222.5 mm	4
TB 8 PJ	47.5 – 222.5 mm	8
TB 12 PJ	62.5 – 222.5 mm	12
TB 16 PJ	62.5 – 222.5 mm	16
TB 6 PL	78 – 388 mm	6
TB 8 PL	78 – 388 mm	8
TB 10 PL	88 – 388 mm	10
TB 12 PL	88 – 388 mm	12
TB 16 PL	103 – 388 mm	16

optibelt ZRS
STANDARD TOOTHED PULLEYS

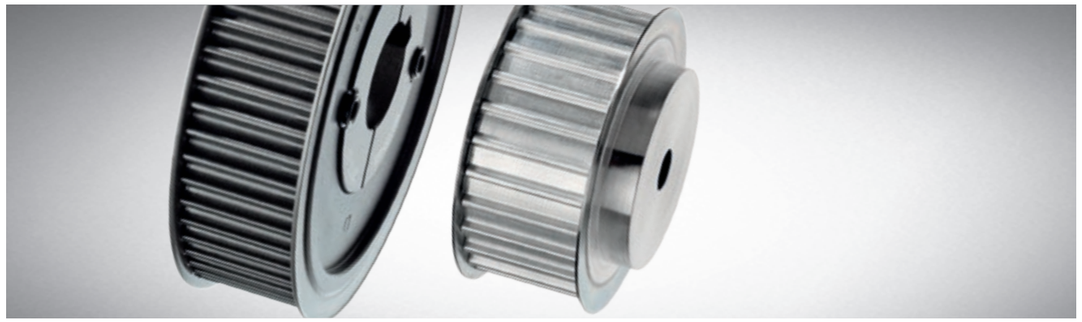

FOR TAPER BUSHES		
PROFILE	BELT WIDTH (mm)	TEETH
L	12.7 / 19.1 / 25.4	18 – 120
H	25.4	16 – 120
	38.1 / 50.8	18 – 120
	76.2	20 – 120
XH	50.8 / 76.2	18 – 48
	101.6	20 – 48

FOR CYLINDRICAL BORES		
PROFILE	BELT WIDTH (mm)	TEETH
XL	6.4 / 7.9 / 9.5	10 – 72
L	12.7 / 19.1 / 25.4	10 – 84
H	19.1	14 – 48
	25.4 / 38.1 / 50.8	14 – 120
	76.2	16 – 120
XH	50.8 / 76.2 / 101.6	18 – 96

optibelt ZRS DC
STANDARD TOOTHED PULLEYS

The 8M **DELTA CHAIN** pulleys are available in 4 different widths of 12 mm, 21 mm, 36 mm and 62 mm, matching the **optibelt DELTA CHAIN Carbon** belt range.

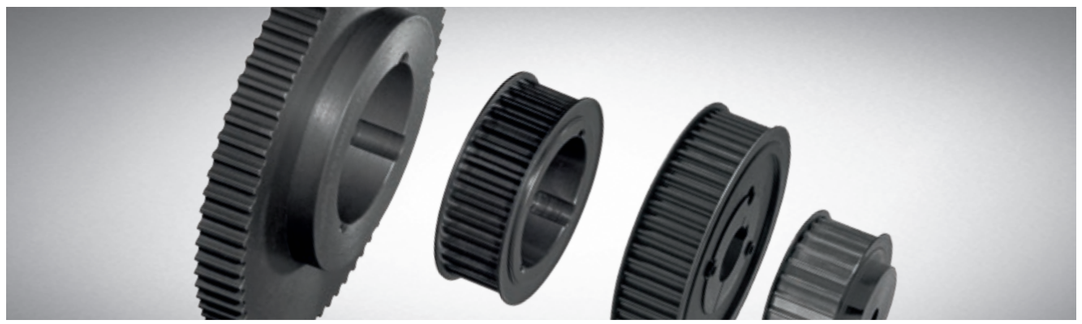

FOR TAPER BUSHES		
PROFILE	BELT WIDTH	TEETH
8MDC	12 mm	22 – 192
	21 mm	22 – 192
	36 mm	22 – 192
8MDC	62 mm	22 – 192
14MDC	20 mm	
	37 mm	
	68 mm	
	90 mm	
	125 mm	

© OPTIBELT GMBH 2019