


optibelt KS

V-GROOVED PULLEYS

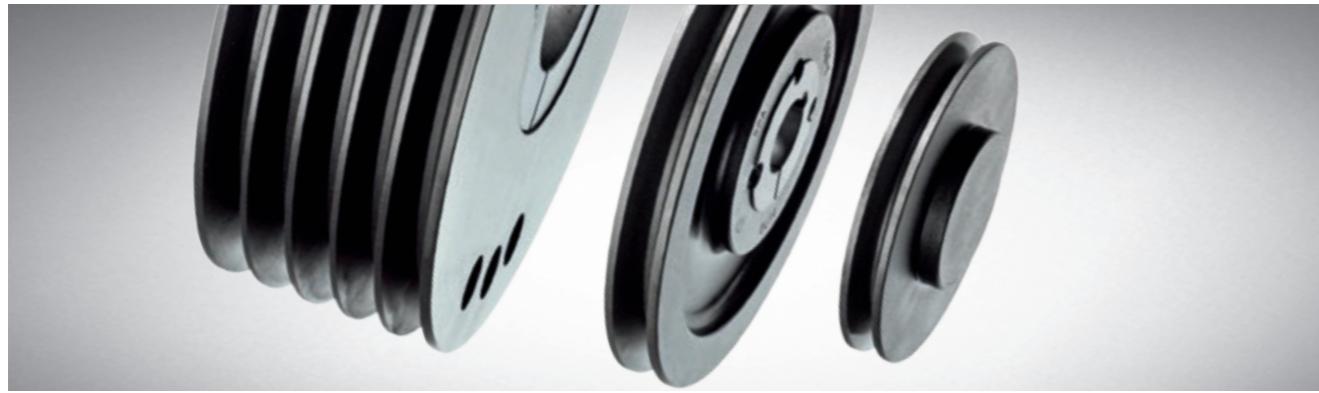


FOR CYLINDRICAL BORES*			FOR TAPER BUSHES*		
PROFILE	ORIENTATION CROSS SECTION	GROOVES	PROFILE	ORIENTATION CROSS SECTION	GROOVES
SPZ / 10	45–355 mm	1–3	SPZ / 10	50– 630 mm	1– 8
SPA / 13	50–560 mm	1–5	SPA / 13	63– 630 mm	1– 5
SPB / 17	56–630 mm	1–6	SPB / 17	100–1000 mm	1–10
SPC / 22	180–630 mm	1–6	SPC / 22	200–1250 mm	2–10

* in accordance with DIN 2211

optibelt RBS


RIBBED BELT PULLEYS

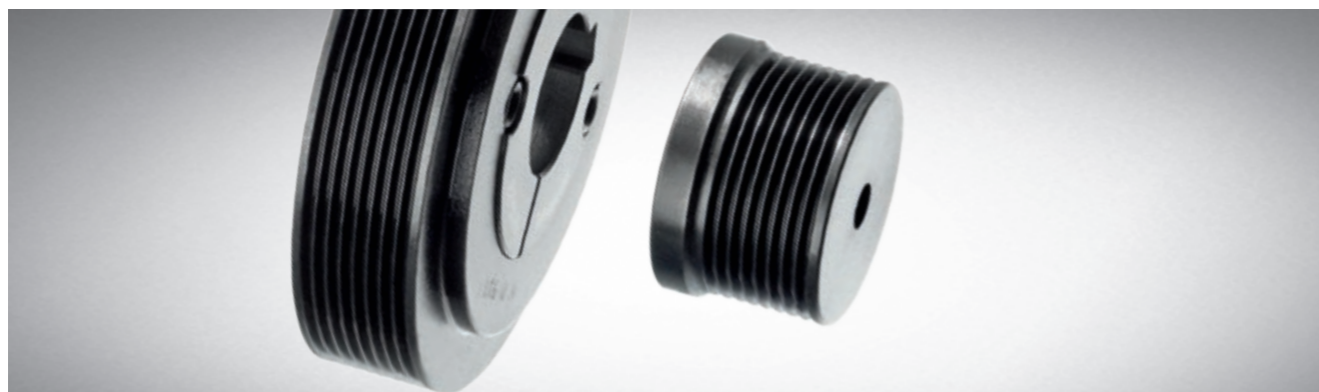

FOR CYLINDRICAL BORES			FOR TAPER BUSHES		
DESIGNATION	DIMENSIONS	GROOVES	DESIGNATION	DIMENSIONS	GROOVES
4 PJ	22.5–42.5 mm	4	TB 4 PJ	47.5–222.5 mm	4
8 PJ	22.5–42.5 mm	8	TB 8 PJ	47.5–222.5 mm	8
12 PJ	22.5–42.5 mm	12	TB 12 PJ	62.5–222.5 mm	12
			TB 16 PJ	62.5 – 222.5 mm	16
			TB 6 PL	78 – 388 mm	6
			TB 8 PL	78 – 388 mm	8
			TB 10 PL	88 – 388 mm	10
			TB 12 PL	88 – 388 mm	12
			TB 16 PL	103 – 388 mm	16

optibelt ZRS

STANDARD TOOTHED PULLEYS

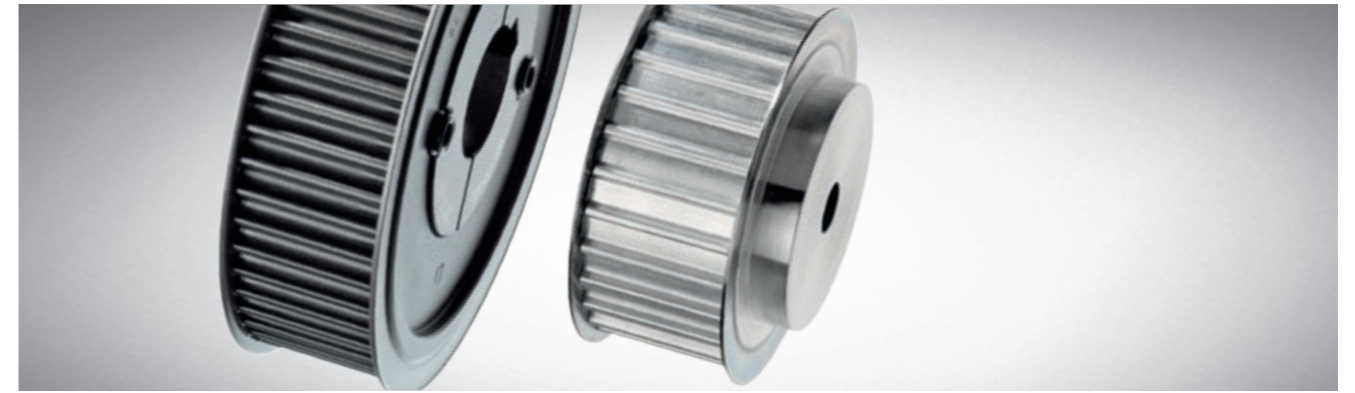


FOR TAPER BUSHES			FOR CYLINDRICAL BORES		
PROFILE	BELT WIDTH (mm)	TEETH	PROFILE	BELT WIDTH (mm)	TEETH
L	12.7 / 19.1 / 25.4	18–120	XH	50.8 / 76.2 / 101.6	18–48 / 20–48
H	25.4 / 38.1 / 50.8 / 76.2	16–120 / 18–120 / 20–120	L	12.7 / 19.1 / 25.4	10– 84 / 14– 48 / 14–120 / 16–120
			H	19.1 / 25.4 / 38.1 / 50.8 / 76.2	14– 48 / 14–120 / 16–120 / 18– 96
			XH	50.8 / 76.2 / 101.6	18– 96
			XL	6.4 / 7.9 / 9.5	10–72

optibelt ZRS DC

STANDARD TOOTHED PULLEYS

The 8M DELTA CHAIN pulleys are available in 4 different widths of 12 mm, 21 mm, 36 mm and 62 mm, matching the optibelt DELTA CHAIN Carbon belt range.

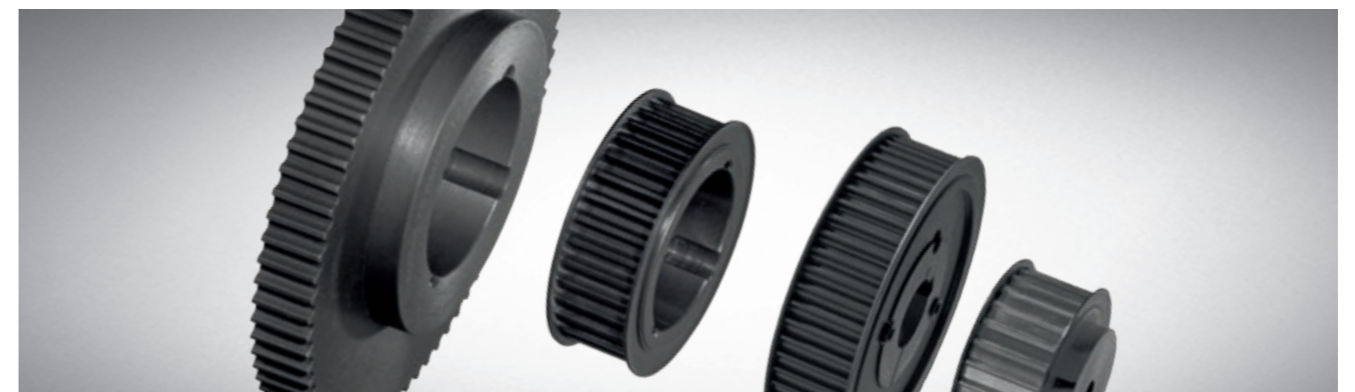

FOR TAPER BUSHES			FOR CYLINDRICAL BORES		
PROFILE	BELT WIDTH	TEETH	PROFILE	BELT WIDTH (mm)	TEETH
8MDC	12 mm / 21 mm / 36 mm	22–192	8MDC	62 mm	22–192
			14MDC	20 mm / 37 mm / 68 mm / 90 mm / 125 mm	